



## **External door mount**



### **Features**


- ♦ IP55 waterproof at external side
- ◆ "One touch" dry run test and dust cleaning
- ◆ Standalone temperature control
- ♦ Clear LED status indicator
- Dry contact alarm output

#### Design

- ◆ Air to air heat exchange
- ♦ Rated voltage at 48V
- Reduntant fan quantity design
- ♦ High efficiency and reliable fan
- ♦ Easy installation and maintenance

# **HEX150PC** series

## **Dimension drawing**

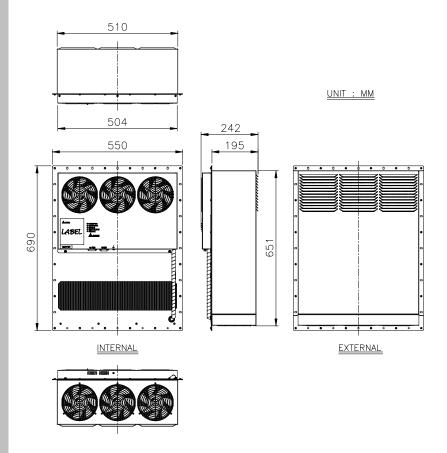

Main feature	Unit	Specification	
Dimension (H x W x D)	mm (inch)	690 x 550 x 242 (27 x 22 x 10)	
Cooling capacity <sub>∗Note</sub>	<b>W/K (W/</b> °F)	100 (56)	135 (75)
Rated voltage	VDC	48	
Operating current	Α	2.6	5.8
Opearting power	W	125	279
Operating voltage range	VDC	40 ~ 60	
Operating temperature range	°C	-10 ~ +65	
Noise (1.5 meter)	dB-A	65.0	73.0
Weight	Kg (Lb)	20 (44)	

\* Note : The cooling capacity (W/K , W/°C or W/°F) is defined as Q/ (TI-TA)

Q: Heat dissipation (W) from inside of cabinet

TI: Return temperature of internal air circuit (K, °C or °F)

TA: Ambient temperature of external air circuit (K, °C or °F)

<sup>\*</sup> Specifications are subject to change without notice.